



P-ISSN: 2349-8528
 E-ISSN: 2321-4902
 IJCS 2017; 5(6): 1076-1079
 © 2017 IJCS
 Received: 29-09-2017
 Accepted: 30-10-2017

VR Parameswari
 Principal Investigator,
 Department of Chemistry,
 J.K.K.N College of Arts &
 Science, Komarapalayam, Tamil
 Nadu, India.

Adsorption of cationic dyes by perillite clay-MnO₂ nanocomposite

VR Parameswari

Abstract

In this study an attempt has been made to study the feasibility of removal of methyl violet using perillite-MnO₂ nanocomposite as an adsorbent. The commercially available Perillite and MnO₂ are stirred with alcohol, dried and used. Batch adsorption experiments have been conducted under various operating parameters like initial dye concentration, contact time, adsorbent dose and pH. The equilibrium data fitted well with the Langmuir and Freundlich isotherms.

Keywords: Adsorption isotherm, methyl violet, Perillite-MnO₂ nanocomposite

1. Introduction

Various methods like coagulation, oxidation, electrochemical, ion-exchange, biodegradation and ultra-filtration have been applied to overcome the excessive discharges of colourants from petrochemical, textile, leather-making, pharmaceutical as well as food and beverage industries. All these are not comparable to adsorption technique in term of efficiency, operating cost, process flexibility and ease of operation (Shi and Li, 2007; Fathima, 2008; Shen, 2006; Ahmad, 2006; Raghu and Ahmed Basha, 2007; Walker and Weatherley, 2000) [1-6]. Further all these techniques were found to be inefficient and incompetent because of the fairly high solubility and stability of the dyes towards light, oxidizing agents and aerobic digestion. A comprehensive survey indicates that adsorption technique was the most appropriate and efficient one (Ruthven, 1984; Suzuki, 1993) [7-8]. The objective of the present study was to explore the feasibility of the removal of methyl violet using the nanocomposites prepared from Stishovite clay and TiO₂ as adsorbent.

2. Materials and Methods

Perillite (3g) was allowed to swell in 15 ml of water-free alcohol and stirred for 2 hours at 25^oC to get a uniform suspension. At the same time, the Manganese dioxide was dispersed into water-free alcohol. The diluted Manganese dioxide was then added slowly by dropping it into the suspension of Perillite and stirred for further 5 hours at 25^oC. Then 5ml alcohol mixed with 0.2 ml deionized water was added slowly and stirring continued for another 5 hours at 25^oC. The suspension was then kept over night for 10 hours at room temperature and the precipitate obtained was carefully dehydrated in a vacuum oven for 6 hours at 80^oC to a loose dry powder. A stock solution (1000mg/L) of dye was prepared using doubly distilled water. Various dye solutions with different initial concentrations were prepared by diluting the stock dye solution. The adsorbate used in this study is methyl violet.

3. Characterization of Adsorbent

Physico-chemical characteristics of the adsorbents were studied as per the standard testing methods (Waranusantigul, 2003). Fig.1 shows the XRD pattern of Perillite-MnO₂ nanocomposite. The peaks at 28^o (Fig.2) confirm the presence of Perillite-MnO₂ phase in the nanocomposite. The surface morphology of the adsorbent was visualized via scanning electron microscopy (SEM). The diameter of the composite range was 0.5 μm.

Correspondence
VR Parameswari
 Principal Investigator,
 Department of Chemistry,
 J.K.K.N College of Arts &
 Science, Komarapalayam, Tamil
 Nadu, India.

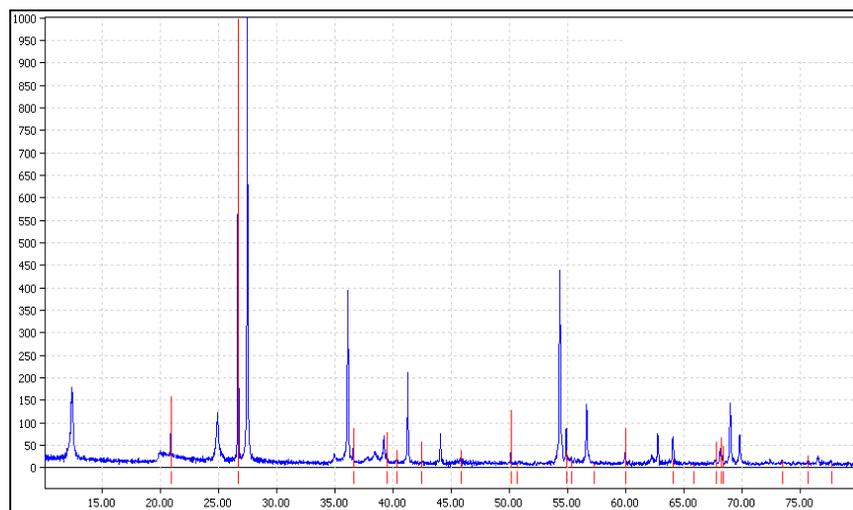


Fig. 1: XRD analysis of Perilite-MnO₂ composite

Sem

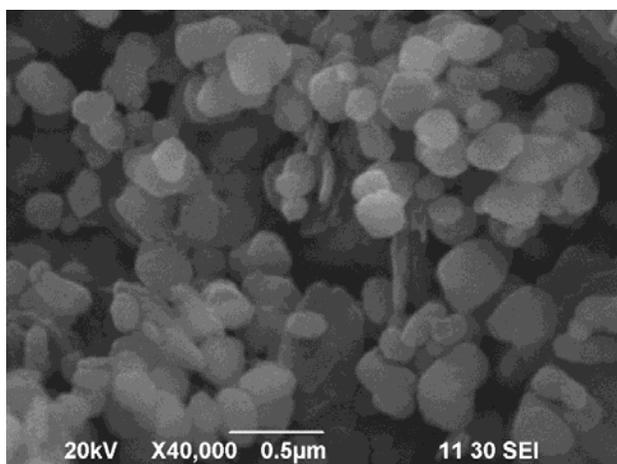


Fig 2: SEM of Perilite-MnO₂ nanocomposite

4. Batch adsorption experiments

Entire batch mode experiments were carried out in the temperature range 303K to 311K by taking 50 ml of the respective dye solution and known amount of the adsorbent in a 100 ml conical flask. The flasks were agitated for determined time intervals in a thermostat attached with a shaker at the desired temperature. The adsorbent and adsorbate were separated by filtration. Studies on the effects of agitation time, pH, initial dye concentration, adsorbent dose were carried out by using known amount of adsorbent and 50 ml of dye solution of different concentrations. Dye solution (50 ml) with different amounts of adsorbent was taken to study the effect of adsorbent dosage on the removal of dyes.

5. Results and Discussion

5.1. Effect of agitation time and initial dye concentration

The effect of initial dye concentration and contact time for the removal of methyl violet is shown in Fig.3. For this study 50 ml of 10 to 25 mg/L of dye solution was agitated with 100 mg of adsorbent. The extent of removal of dye was faster in initial stages, then showed decreasing pattern and finally became constant showing the attainment of equilibrium. The extent of removal was found to be 87%. The curves obtained are single

and smooth, indicating monolayer coverage on the adsorbent surface.

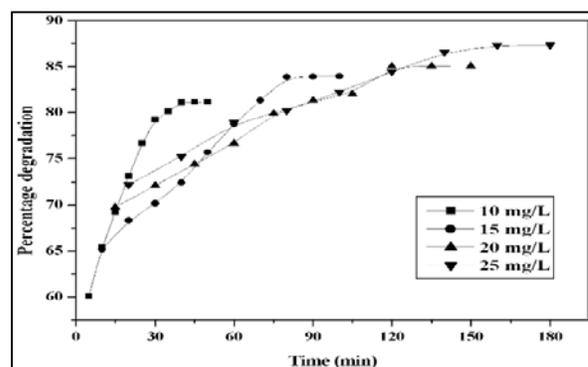


Fig 3: Effect of agitation time and initial dye concentration of Methyl violet on Perilite-MnO₂ nanocomposite

5.2. Effect of adsorbent dosage on adsorption process

The effect of adsorbent dosage on basic dye removal was studied by keeping all other experimental conditions constant except that of adsorption dosage. The amount adsorbed per unit mass of the adsorbent decreased with increase in adsorbent concentration (Fig.4). The decrease in unit adsorption with increasing dose of adsorbent may basically be due to the fact that adsorption sites remaining unsaturated during the adsorption process.

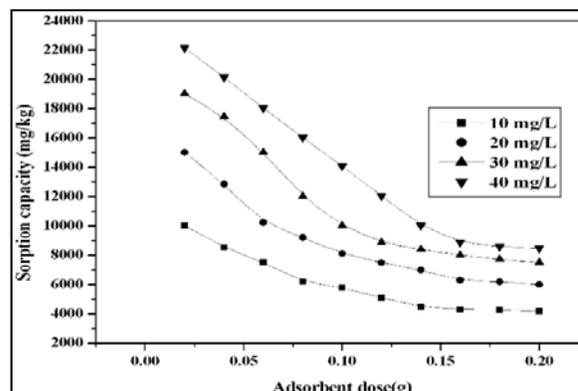


Fig 4: Effect of adsorbent dose on the removal of Methyl violet on Perilite-MnO₂ nanocomposite.

5.3. Effect of pH

Adsorption experiments were carried out at various pH values ranging from 5 to 11 maintaining the required pH by adding necessary amount of dilute hydrochloric acid and sodium

hydroxide solutions. A pH meter calibrated with 4.0 and 9.0 buffers were used. Fig.5 indicates that maximum dye removal had occurred in basic medium. It was observed that as the pH increases the sorption capacity also increases.

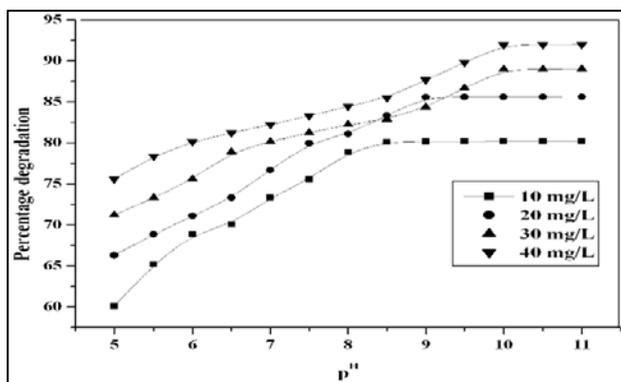


Fig 5: Effect of pH on the removal of Methyl violet on Perilite-MnO₂ nanocomposite.

5.4. Adsorption isotherm

The relationship between the amount of dye adsorbed and its equilibrium concentration was analysed using Langmuir and Freundlich isotherms.

5.4.1. Langmuir isotherm

The Langmuir adsorption isotherm which assumes that adsorption takes place at specific homogeneous sites within the adsorbent has been used successfully for many systems that involve monolayer adsorptions. The linearized Langmuir equation (Eq.1). Where C_e is the equilibrium concentration of the adsorbate (mg/L), q_e is the amount of dye adsorbed per unit mass of adsorbent (mg/L) and q₀ and b are Langmuir constants related to adsorption capacity and adsorption rate respectively. As required by equation (1) plotting C_e/q_e against C_e gave a straight line, indicating that the adsorption of basic dyes on the nanocomposite follow the Langmuir isotherm. The Langmuir constants b and q₀ were evaluated, from the slope and intercept of the graph. The essential characteristics of the Langmuir isotherm can be expressed in terms of a dimensionless equilibrium parameter R_L, which is defined by, (2) Where, C₀ is the highest initial solute concentration, 'b' the Langmuir adsorption constant (L/mg).

$$q_e = \frac{Q^0 b C_e}{1 + b C_e} \dots\dots\dots(1)$$

$$R_L = \frac{1}{1 + b C_0} \dots\dots\dots(2)$$

If the value of R is less than one then it indicates favourable adsorption. The R_L values shown in Table 1 all are less than one indicating the applicability of Langmuir isotherm to this adsorption process.

Table 1: The Langmuir Adsorption isotherm on the removal of Methyl violet on Perilite-MnO₂nanocomposite.

Dye Concentration (C ₀)	C _e	q _e (mg/kg)	C _e /q _e
5	3.63	1685	0.0021
10	4.42	2486	0.0017
15	5.53	3652	0.0015
20	6.86	4238	0.0016
25	8.95	5236	0.0017
30	10.35	8412	0.0012

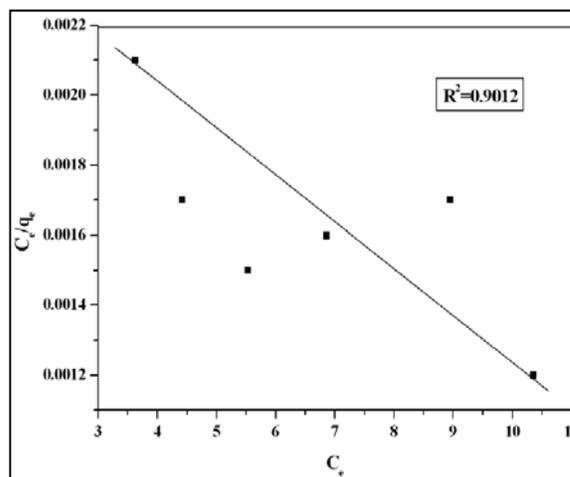


Fig 6: Langmuir adsorption isotherm on the removal of Methyl violet on Perilite-MnO₂ nanocomposite.

5.4.2. Freundlich Model

The Freundlich isotherm, an empirical relationship used to describe heterogeneous systems can be expressed in its logarithmic form (Eq.3): (3) Where K_f and 1/n are Freundlich constants related to adsorption capacity and adsorption intensity of the sorbent respectively. q_e is the amount adsorbed at equilibrium (mg/g); C_e is the equilibrium concentration of the adsorbate. The values of K_f and 1/n calculated from the intercept and slope respectively are recorded in Table 2. The plot of log q_e versus log C_e gave a straight line (Fig.7) with good regression coefficient indicating that the adsorption of methyl violet follows the Freundlich isotherm.

$$\log q_e = \log K_f + \frac{1}{n} \log C_e \dots\dots\dots(3)$$

Table 2: The Freundlich adsorption isotherm on the removal of Methyl violet on Perilite-MnO₂ nanocomposite.

Dye Concentration (C ₀)	log C _e	log q _e
5	0.3275	3.2451
10	0.6340	3.6425
15	0.7501	3.8745
20	0.8345	3.9415
25	0.9879	4.0123
30	1.4586	4.2145

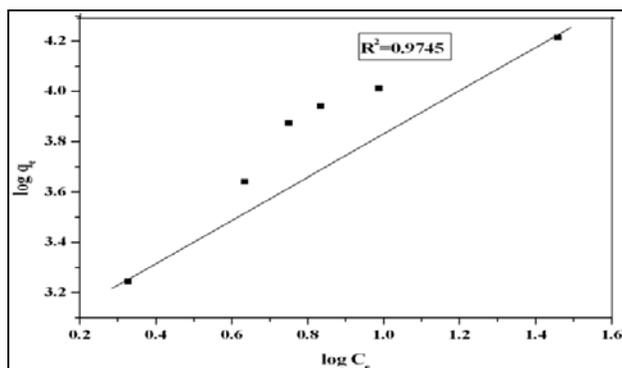


Fig 7: Freundlich adsorption isotherm on the removal of Methyl violet on Perilite-MnO₂ nanocomposite.

6. Conclusion

The present investigation showed that Perilite-MnO₂ nanocomposite can be used as adsorbent for removal of methyl violet. The amount of dye adsorbed varied with initial dye concentration, adsorbent dose and pH. Removal of methyl violet by nanocomposite obeyed both Langmuir and Freundlich isotherms.

References

1. Shi Li BG. Removal of direct dyes by coagulation: The performance polymeric aluminium species. *Journal of Hazardous Materials*. 2007; 143(1-2):567-574.
2. Fathima NN. Dye house wastewater treatment through advanced oxidation process using Cu-exchanged Y zeolite: A heterogenous catalytic approach *Chemosphere*. 2008; 70(6):1146-1151.
3. Shen ZM. Methods to improve electrochemical treatment effect of dye wastewater. *Journal of Hazardous Materials*. 2006; 131(1-3):90-97.
4. Ahmad. Micellar-enhancement ultra filtration for removal of reactive dyes from an aqueous solution. *Desalination*, 2006; 191(1-3):153-161.
5. Raghu S, Ahmed Basha C. Chemical or electrochemical techniques, followed by ion exchange for recycle of textile dye wastewater. *Journal of Hazardous Materials*. 2007; 149(2):324-330.
6. Walker GM, Weatherley LR, Biodegradation and biosorption of acid anthraquinone dye. *Environmental Pollution*. 2000; 108(2):219-223.
7. Ruthven DM. *Principles of Adsorption and Desorption Processes*, John Willey and Sons, New York, 1984.
8. Suzuki. *Fundamentals of Adsorption IV*, Kodansha, Tokyo, 1993.